




Fiber Optic Distribution Box 16 ports FQX-16-13+PW16

Description

HBY Model No. FQX-16-13+PW16, this distribution box can realize the functions of fiber fusion, distribution and scheduling in the FTTH system. This fiber box is made of new ABS material, and its shell is strong and durable. And IP65's protection rating allows it to be installed and used outdoors. Internally, this kind of FDB can also be fitted with a variety of stents to install adapters, mini steel splitter or cassette splitter.

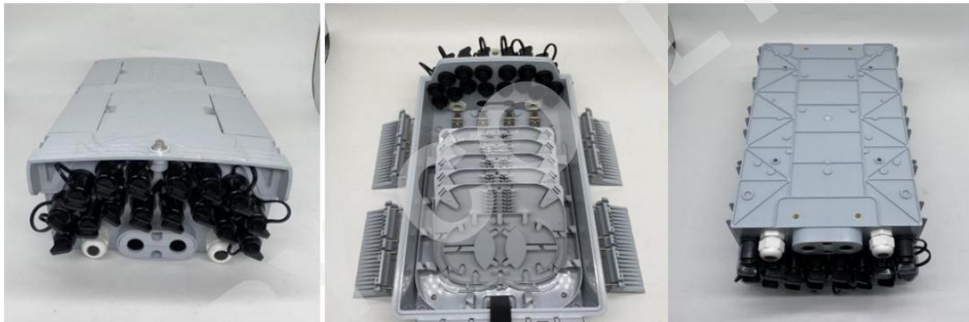

Product Specifications

Item	Fiber Optic Distribution Box 16 ports
Dimension (mm)	340MM*220MM*105MM
Material	ABS
Weight (Kg)	2kg
No. of Cable Inlet/Outlet	4IN-16OUT
Type of inlet	Waterproof connectors
Adaptor accommodating	Max.16 port of SC, FC, LC, E2K
Splitter	One for 1x8 splitter; Two for 1x16 splitter
Working Temperature	-30deg.C~80deg.C
Protection Grade	IP65



Ordering Information

FiberNex PN	Capacity (single core)	Adaptor type	Description
FQX-16-13+PW16	16 Port	SC	Fiber Optic Subscriber Distribution box 16 Port SC type
FQX-16-13+PW16	16Port	FC	Fiber Optic Subscriber Distribution box 16 Port FC type
FQX-16-13+PW16	16 Port	LC	Fiber Optic Subscriber Distribution box 16 Port LC type
FQX-16-13+PW16	16 Port	E2K	Fiber Optic Subscriber Distribution box 16 Port E2K type

*Does not including adaptors, pigtailed and splitter. Additional configurations can be made if required

Packing Info

- Carton packing: 10sets/carton
- Carton size: 47.5*37*59cm
- Weight: 21kg/carton

- www.hbyweb.ru
- www.hbyweb.com.br
- E-mail: sales@hbyweb.com