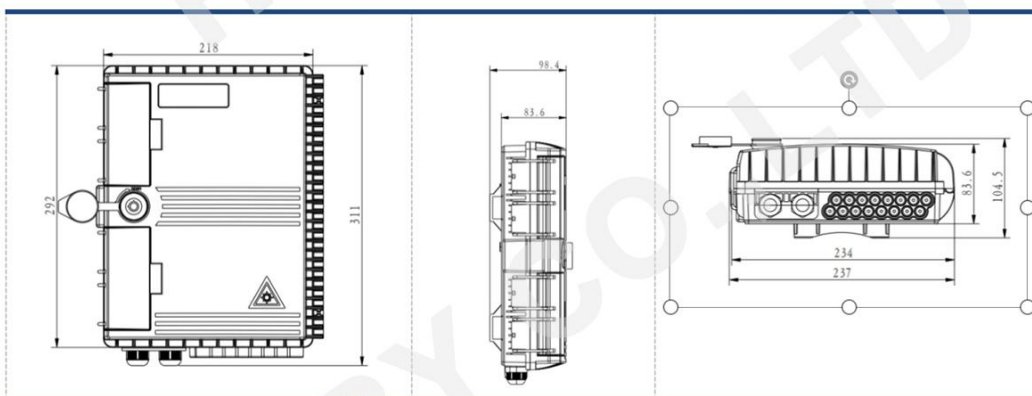# Datasheet of Fiber Optical Terminal Box

Overview

HBY Model No. HBY-1001-F010 can connect the drop cable with feeder cable as the termination point in the Fttx network, which is cable to meet at least 16 users requirements. It can help splicing, splitting, storage and management with suitable space.

Technical Index

Model No.	HBY-100-F010	Color	Black, Grey White..
Capacity	16cores	Protection Level	IP55
Material	PC+ABS, ABS	Flame retardant performance	Non-flame retardant
Dimension(L*W*D,MM)	311*237*104	Splitter	Can be with 2x1:8 Tube or Lgx spliite

The dimension diagram:(mm)

Features

3.1 The body is made of high quality engineering plastic with good strength;

3.2 With safe special-shaped lock, the box can be opened easily and has good water-proof performance, suitable for indoor and outdoor natural environments

3.3 With the independent rubber sealing plug for drop cable, better waterproof performance

3.4 With double-page design, the box can be installed and maintained easily, the fusion and termination are completely separated

3.5 The drop leaf can be installed 2 pcs of 1*8 tube splitter

Package Information

4.1 Plastic bag size: 500*410mm

4.2 Inner box with single corrugated size: 320*240*115mm

4.3 Carton with double corrugated size: 605*335*495mm(10PCS/Box)

4.4 Weight per carton : 16.5KG

pictures for reference:TYP 1(LGX splittee)

MAX Loaded 2X1*8 PLC splitter

Fiber Storage & Splitter & Fusion Distribution

Sealing Locks

KEEP BOX SEALED

Mid-span Acess & Cable Gland Option

2IN, MAX 16 OUT

pictures for reference:TYP 2 (tube splittee)

MAX Loaded 16SC Adaptors

Fiber Storage & Splitter & Fusion Distribution

Sealing Locks

KEEP BOX SEALED

Mid-span Acess & Cable Gland Option

2IN, MAX 16 OUT

- Carton packing: 10sets/carton
- Carton size: 47.5*37*59cm
- Weight: 21kg/carton

- www.hbyweb.ru
- www.hbyweb.com.br
- E-mail:sales@hbyweb.com