


Fiber Socket&Outlet&FTTH Box

For FTTH Cabling system

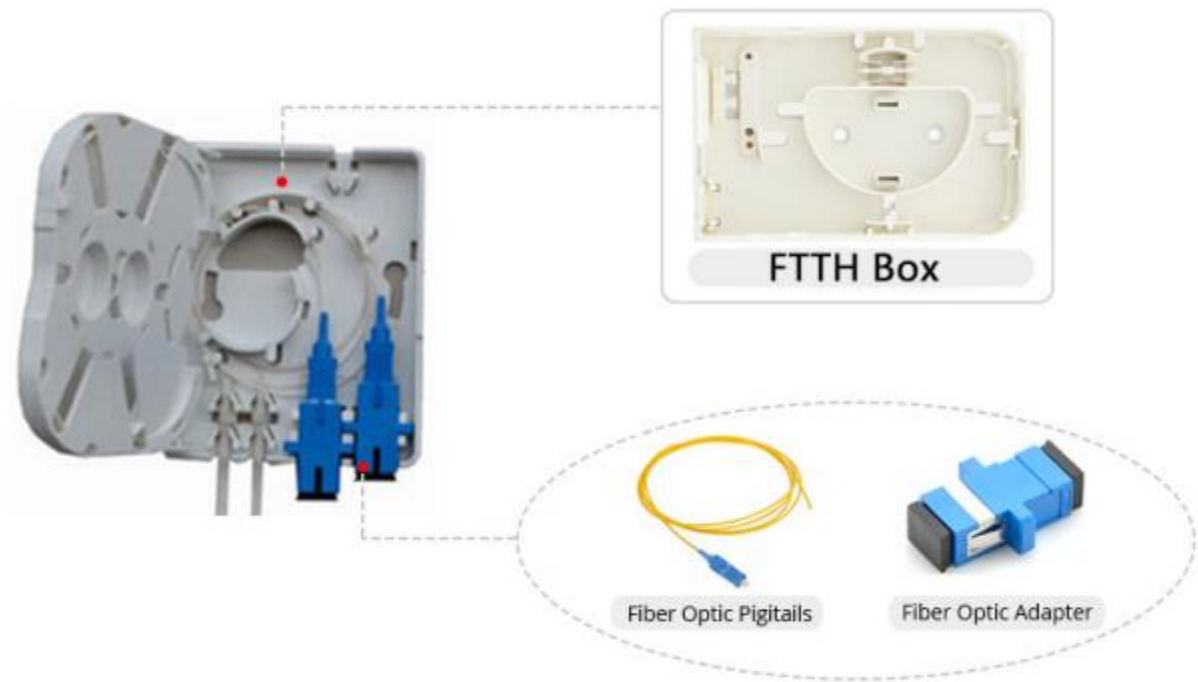

Shenzhen HBY Electronics Co., Ltd.

2023|En version3.0

1 Port Fiber Socket&Outlet&FTTH Box

Fiber socket : ZMH-DMP-01

- Water-proof design with IP-45 Protection level.
- Integrated with cable termination and management rods
- Manage fibers in a reasonable fiber radius(30mm) condition. High quality industrial anti-aging ABS plastic material.
- Suitable for the wall mounted installation. Suitable for FTTH indoor application.
- 2/4 port cable entrance for drop cable or patch cable.
- Fiber adapter can be installed in the rosette for patching.
- UL94-V0 fire-retardant material can be customized as option.



Part NO	Material	Size	Max Capacity		Mounting Way	Package	Color
ZMH-DMP-01	Industrial ABS	L*W*H(mm) 86*86*25	SC Simplex 2 Cores	LC Duplex 4 Cores	Wall Mounting or in-side FTTH media box application	PE bag or OEM	White

Fiber socket : ZMH-3C-01+SC

- Water-proof design with IP-45 Protection level.
- Integrated with cable termination and management rods
- Manage fibers in a reasonable fiber radius(30mm) condition. High quality industrial anti-aging ABS plastic material.
- Suitable for the wall mounted installation. Suitable for FTTH indoor application.
- 1/2 port cable entrance for drop cable or patch cable.
- Fiber adapter can be installed in the rosette for patching.
- UL94-V0 fire-retardant material can be customized as option.



Part NO	Material	Size	Max Capacity		Mounting Way	Package	Color
ZMH-3C-01+SC	Industrial ABS	L*W*H(mm) 93*83*23	SC Simplex 1 Core	LC Duplex 2 Cores	Wall Mounting or in-side FTTH media box application	PE bag or OEM	White

Fiber socket : ZMH-5C-01SZ

- Water-proof design with IP-45 Protection level.
- Integrated with cable termination and management rods
- Manage fibers in a reasonable fiber radius(30mm) condition. High quality industrial anti-aging ABS plastic material.
- Suitable for the wall mounted installation. Suitable for FTTH indoor application.
- 1/2 port cable entrance for drop cable or patch cable.
- Fiber adapter can be installed in the rosette for patching.
- UL94-V0 fire-retardant material can be customized as option.



Part NO	Material	Size	Max Capacity		Mounting Way	Package	Color
ZMH-5C-01SZ	Industrial ABS	L*W*H(mm) 120*90*23	SC Simplex 1 Core	LC Duplex 2 Cores	Wall Mounting or in-side FTTH media box application	PE bag or OEM	White

1 Port Fiber Socket&Outlet&FTTH Box

Fiber socket : ZMH-6C-01SZ

- Water-proof design with IP-45 Protection level.
- Integrated with cable termination and management rods
- Manage fibers in a reasonable fiber radius(30mm) condition. High quality industrial anti-aging ABS plastic material.
- Suitable for the wall mounted installation. Suitable for FTTH indoor application.
- 2/4 port cable entrance for drop cable or patch cable.
- Fiber adapter can be installed in the rosette for patching.
- UL94-V0 fire-retardant material can be customized as option.



Part NO	Material	Size	Max Capacity		Mounting Way	Package	Color
ZMH-6C-01SZ	Industrial ABS	L*W*H(mm) 86*86*20	SC Simplex 2 Cores	LC Duplex 4 Cores	Wall Mounting or in-side FTTH media box application	PE bag or OEM	White

Fiber socket : ZMH-5C-01+SC

- Water-proof design with IP-45 Protection level.
- Integrated with cable termination and management rods
- Manage fibers in a reasonable fiber radius(30mm) condition. High quality industrial anti-aging ABS plastic material.
- Suitable for the wall mounted installation. Suitable for FTTH indoor application.
- 1/2 port cable entrance for drop cable or patch cable.
- Fiber adapter can be installed in the rosette for patching.
- UL94-V0 fire-retardant material can be customized as option.



Transparent dust cover

Part NO	Material	Size	Max Capacity		Mounting Way	Package	Color
ZMH-5C-01+SC	Industrial ABS	L*W*H(mm) 115*86*23	SC Simplex 1 Core	LC Duplex 2 Cores	Wall Mounting or in-side FTTH media box application	PE bag or OEM	White

Fiber socket : ZMH-6C-01+SC

- Water-proof design with IP-45 Protection level.
- Integrated with cable termination and management rods
- Manage fibers in a reasonable fiber radius(30mm) condition. High quality industrial anti-aging ABS plastic material.
- Suitable for the wall mounted installation. Suitable for FTTH indoor application.
- 1/2 port cable entrance for drop cable or patch cable.
- Fiber adapter can be installed in the rosette for patching.
- UL94-V0 fire-retardant material can be customized as option.



Part NO	Material	Size	Max Capacity		Mounting Way	Package	Color
ZMH-6C-01+SC	Industrial ABS	L*W*H(mm) 145*89*16	SC Simplex 1 Core	LC Duplex 2 Cores	Wall Mounting or in-side FTTH media box application	PE bag or OEM	White

1 Port Fiber Socket&Outlet&FTTH Box

Fiber socket : ZMH-7C-01+SC

- Water-proof design with IP-45 Protection level.
- Integrated with cable termination and management rods
- Manage fibers in a reasonable fiber radius(30mm) condition. High quality industrial anti-aging ABS plastic material.
- Suitable for the wall mounted installation. Suitable for FTTH indoor application.
- 1 port cable entrance for drop cable or patch cable.
- Fiber adapter can be installed in the rosette for patching.
- UL94-V0 fire-retardant material can be customized as option.



Part NO	Material	Size	Max Capacity		Mounting Way	Package	Color
ZMH-7C-01+SC	Industrial ABS	L*W*H(mm) 86*86*20	SC/LC/FC/ ST Simplex 1 Cores	LC Duplex 2 Cores	Wall Mounting or in- side FTTH media box application	PE bag or OEM	White

Fiber socket : ZMH-7C-01SZ



Part NO	Material	Size	Max Capacity		Mounting Way	Package	Color
ZMH-7C-01SZ	Industrial ABS	L*W*H(mm) 86*86*20	SC/LC/FC/ ST Simplex 1 Cores	LC Duplex 2 Cores	Wall Mounting or in- side FTTH media box application	PE bag or OEM	White

Adapter port Module For ZMH-7C-01+SC-1x/2x/4x Series



Base&Fiber storage box for FS-1x and 2x



FSB-1A:
86*86*37mm,
ABS Material

FSB-1B:
86*86*37mm,
ABS Material

2 Ports Fiber Socket&Outlet&FTTH Box Fiber socket :

ZMH-8C-01+SC

- Water-proof design with IP-45 Protection level.
- Integrated with cable termination and management rods
- Manage fibers in a reasonable fiber radius(30mm) condition. High quality industrial anti-aging ABS plastic material.
- Suitable for the wall mounted installation. Suitable for FTTH indoor application.
- 2/4 port cable entrance for drop cable or patch cable.
- Fiber adapter can be installed in the rosette for patching.
- UL94-V0 fire-retardant material can be customized as option.



Part NO	Material	Size	Max Capacity		Mounting Way	Package	Color
ZMH-8C-01+SC	Industrial ABS	L*W*H(mm) 80*80*20	SC Simplex 2 Cores	LC Duplex 4 Cores	Wall Mounting or in-side FTTH media box application	PE bag or OEM	White

Fiber socket : ZMH-9C-01+SC

- Water-proof design with IP-45 Protection level.
- Integrated with cable termination and management rods
- Manage fibers in a reasonable fiber radius(30mm) condition. High quality industrial anti-aging ABS plastic material.
- Suitable for the wall mounted installation. Suitable for FTTH indoor application.
- 2/4 port cable entrance for drop cable or patch cable.
- Fiber adapter can be installed in the rosette for patching.
- UL94-V0 fire-retardant material can be customized as option.



Part NO	Material	Size	Max Capacity		Mounting Way	Package	Color
ZMH-9C-01+SC	Industrial ABS	L*W*H(mm) 105*83*24	SC SX 2 Cores	LC DX 4 Cores	Wall Mounting or in-side FTTH media box application	PE bag or OEM	White

Fiber socket : ZMH-10C-01+SC

- Water-proof design with IP-45 Protection level.
- Integrated with cable termination and management rods
- Manage fibers in a reasonable fiber radius(30mm) condition. High quality industrial anti-aging ABS plastic material.
- Suitable for the wall mounted installation. Suitable for FTTH indoor application.
- 2/4 port cable entrance for drop cable or patch cable.
- Fiber adapter can be installed in the rosette for patching.
- UL94-V0 fire-retardant material can be customized as option.



Transparent dust cover

Part NO	Material	Size	Max Capacity		Mounting Way	Package	Color
ZMH-10C-01+SC	Industrial ABS	L*W*H(mm) 115*82*22	SC Duplex 2 Cores	LC Quad 4 Cores	Wall Mounting or in-side FTTH media box application	PE bag or OEM	White

2 Ports Fiber Socket&Outlet&FTTH Box Fiber socket :

ZMH-11C-01+SC

- Water-proof design with IP-45 Protection level.
- Integrated with cable termination and management rods
- Manage fibers in a reasonable fiber radius(30mm) condition. High quality industrial anti-aging ABS plastic material.
- Suitable for the wall mounted installation. Suitable for FTTH indoor application.
- 2/4 port cable entrance for drop cable or patch cable.
- Fiber adapter can be installed in the rosette for patching.
- UL94-V0 fire-retardant material can be customized as option.



Part NO	Material	Size	Max Capacity		Mounting Way	Package	Color
ZMH-11C-01+SC	Industrial ABS	L*W*H(mm) 105*83*24	SC Simplex 2 Cores	LC Duplex 4 Cores	Wall Mounting or in-side FTTH media box application	PE bag+Kraft box or OEM	White

Fiber socket : ZMH-12C-01+SC

- Water-proof design with IP-45 Protection level.
- Integrated with cable termination and management rods
- Manage fibers in a reasonable fiber radius(30mm) condition. High quality industrial anti-aging ABS plastic material.
- Suitable for the wall mounted installation. Suitable for FTTH indoor application.
- 2/4 port cable entrance for drop cable or patch cable.
- Fiber adapter can be installed in the rosette for patching.
- UL94-V0 fire-retardant material can be customized as option.



Part NO	Material	Size	Max Capacity		Mounting Way	Package	Color
ZMH-12C-01+SC	Industrial ABS	L*W*H(mm) 130*84*24	SC Simplex 2 Cores	LC Duplex 4 Cores	Wall Mounting or in-side FTTH media box application	PE bag+Kraft box or OEM	White

Fiber socket : ZMH-2C-01+SC

- Water-proof design with IP-45 Protection level.
- Integrated with cable termination and management rods
- Manage fibers in a reasonable fiber radius(30mm) condition. High quality industrial anti-aging ABS plastic material.
- Suitable for the wall mounted installation. Suitable for FTTH indoor application.
- 2/4 port cable entrance for drop cable or patch cable.
- Fiber adapter can be installed in the rosette for patching.
- UL94-V0 fire-retardant material can be customized as option.



Part NO	Material	Size	Max Capacity		Mounting Way	Package	Color
ZMH-2C-01+SC	Industrial ABS	L*W*H(mm) 100*80*25	SC Simplex 2 Cores	LC Duplex 4 Cores	Wall Mounting or in-side FTTH media box application	PE bag+Kraft box or OEM	White

2 Ports Fiber Socket&Outlet&FTTH Box Fiber socket : ZMH-8C-01SZ

- Water-proof design with IP-45 Protection level.
- Integrated with cable termination and management rods
- Manage fibers in a reasonable fiber radius(30mm) condition. High quality industrial anti-aging ABS plastic material.
- Suitable for the wall mounted installation. Suitable for FTTH indoor application.
- 2/4 port cable entrance for drop cable or patch cable.
- Fiber adapter can be installed in the rosette for patching.
- UL94-V0 fire-retardant material can be customized as option.



Part NO	Material	Size	Max Capacity		Mounting Way	Package	Color
ZMH-8C-01SZ	Industrial ABS	L*W*H(mm) 100*80*20	SC Simplex 2 Cores	LC Duplex 4 Cores	Wall Mounting or inside FTTH media box application	PE bag+Kraft box or OEM	White

Fiber socket : ZMH-13C-01+SC

- Water-proof design with IP-45 Protection level.
- Integrated with cable termination and management rods
- Manage fibers in a reasonable fiber radius(30mm) condition. High quality industrial anti-aging ABS plastic material.
- Suitable for the wall mounted installation. Suitable for FTTH indoor application.
- 2/4 port cable entrance for drop cable or patch cable.
- Fiber adapter can be installed in the rosette for patching.
- UL94-V0 fire-retardant material can be customized as option.



Part NO	Material	Size	Max Capacity		Mounting Way	Package	Color
ZMH-13C-01+SC	Industrial ABS	L*W*H(mm) 86*86*20	SC/LC/FC/ ST Simplex 2 Cores	LC Duplex 4 Cores	Wall Mounting or inside FTTH media box application	PE bag or OEM	White

Adapter port Module For HBY-1x/2x/4x Series



Base&Fiber storage box for FS-1x and 2x



FSB-1A:
86*86*37mm,
ABS Material

FSB-1B:
86*86*37mm,
ABS Material

4 Ports Fiber Socket&Outlet&FTTH Box

Fiber socket : ZMH-14C-01+SC

- Water-proof design with IP-45 Protection level.
- Integrated with cable termination and management rods
- Manage fibers in a reasonable fiber radius(30mm) condition. High quality industrial anti-aging ABS plastic material.
- Suitable for the wall mounted installation. Suitable for FTTH indoor application.
- 4/8 port cable entrance for drop cable or patch cable.
- Fiber adapter can be installed in the rosette for patching.
- UL94-V0 fire-retardant material can be customized as option.



Part NO	Material	Size	Max Capacity		Mounting Way	Package	Color
ZMH-14C-01+SC	Industrial ABS	L*W*H(mm) 100*80*30	SC Simplex 4 Cores	LC Duplex 8 Cores	Wall Mounting or in-side FTTH media box application	PE bag+Kraft box or OEM	White

Fiber socket : ZMH-15C-01+SC

- Water-proof design with IP-45 Protection level.
- Integrated with cable termination and management rods
- Manage fibers in a reasonable fiber radius(30mm) condition. High quality industrial anti-aging ABS plastic material.
- Suitable for the wall mounted installation. Suitable for FTTH indoor application.
- 4/8 port cable entrance for drop cable or patch cable.
- Fiber adapter can be installed in the rosette for patching.
- UL94-V0 fire-retardant material can be customized as option.



Part NO	Material	Size	Max Capacity		Mounting Way	Package	Color
ZMH-15-01+SC	Industrial ABS	L*W*H(mm) 150*110*30	SC Simplex 4 Cores	LC Duplex 8 Cores	Wall Mounting or in-side FTTH media box application	PE bag+Kraft box or OEM	White

4 Ports Fiber Socket&Outlet&FTTH Box

Fiber socket : ZMH-16C-01+SC

- Water-proof design with IP-45 Protection level.
- Integrated with cable termination and management rods
- Manage fibers in a reasonable fiber radius(30mm) condition. High quality industrial anti-aging ABS plastic material.
- Suitable for the wall mounted installation. Suitable for FTTH indoor application.
- 4/8 port cable entrance for drop cable or patch cable.
- Fiber adapter can be installed in the rosette for patching.
- UL94-V0 fire-retardant material can be customized as option.



Part NO	Material	Size	Max Capacity		Mounting Way	Package	Color
ZMH-16C-01+SC	Industrial ABS	L*W*H(mm) 100*83*30	SC Simplex 4 Cores	LC Duplex 8 Cores	Wall Mounting or inside FTTH media box application	PE bag+Kraft box or OEM	White

Fiber socket : ZMH-9C-01SZ

- Water-proof design with IP-45 Protection level.
- Integrated with cable termination and management rods
- Manage fibers in a reasonable fiber radius(30mm) condition. High quality industrial anti-aging ABS plastic material.
- Suitable for the wall mounted installation. Suitable for FTTH indoor application.
- 4/8 port cable entrance for drop cable or patch cable.
- Fiber adapter can be installed in the rosette for patching.



Part NO	Material	Size	Max Capacity		Mounting Way	Package	Color
ZMH-9C-01SZ	Industrial ABS	L*W*H(mm) 152*110*30	SC Simplex 4 Cores	LC Duplex 8 Cores	Wall Mounting or inside FTTH media box application	PE bag+Kraft box or OEM	White

4 Ports Fiber Socket&Outlet&FTTH Box

Fiber socket : ZMH-10C-01SZ

- Water-proof design with IP-45 Protection level.
- Integrated with cable termination and management rods
- Manage fibers in a reasonable fiber radius(30mm) condition. High quality industrial anti-aging ABS plastic material.
- Suitable for the wall mounted installation. Suitable for FTTH indoor application.
- 4/8 port cable entrance for drop cable or patch cable.
- Fiber adapter can be installed in the rosette for patching.
- UL94-V0 fire-retardant material can be customized as option.



Part NO	Material	Size	Max Capacity		Mounting Way	Package	Color
ZMH-10C-01SZ	Industrial ABS	L*W*H(mm) 80*80*28	SC Simplex 4 Cores	LC Duplex 8 Cores	Wall Mounting or inside FTTH media box application	PE bag+Kraft box or OEM	White

Fiber socket : ZMH-17C-01+SC

- Water-proof design with IP-45 Protection level.
- Integrated with cable termination and management rods
- Manage fibers in a reasonable fiber radius(30mm) condition. High quality industrial anti-aging ABS plastic material.
- Suitable for the wall mounted installation. Suitable for FTTH indoor application.
- 4/8 port cable entrance for drop cable or patch cable.
- Fiber adapter can be installed in the rosette for patching.
- UL94-V0 fire-retardant material can be customized as option.



Part NO	Material	Size	Max Capacity		Mounting Way	Package	Color
ZMH-17C-01+SC	Industrial ABS	L*W*H(mm) 145*86*26	SC Simplex 4 Cores	LC Duplex 8 Cores	Wall Mounting or inside FTTH media box application	PE bag or OEM	White

Adapter port Module For ZMH-17C-01+SC-1x/2x/4x Series



4 Ports Fiber Socket&Outlet&FTTH Box

Fiber socket : ZMH-11C-01SZ

- Water-proof design with IP-45 Protection level.
- Integrated with cable termination and management rods
- Manage fibers in a reasonable fiber radius(30mm) condition. High quality industrial anti-aging ABS plastic material.
- Suitable for the wall mounted installation. Suitable for FTTH indoor application.
- 8/16 ports cable entrance for drop cable or patch cable.
- Fiber adapter can be installed in the rosette for patching.
- UL94-V0 fire-retardant material can be customized as option.



Part NO	Material	Size	Max Capacity		Mounting Way	Package	Color
ZMH-11C-01SZ	Industrial ABS	L*W*H(mm) 207*115*28	SC Simplex 8 Cores	LC Duplex 16 Cores	Wall Mounting or in- side FTTH media box application	PE bag+Kraft box or OEM	White